



UNLIMITED FIRE DESIGN



ETHANOL
GAS



INDEX

03 **ABOUT US**

04 **ETHANOL INDOOR**
BEV technology®

36 **GAS INDOOR**

50 **TABLE FIREPLACES**
Commerce technology

56 **OUTDOOR FIREPLACES**



designfire

We took on the challenging task and went beyond all the established boundaries to design fire like never before. It was difficult but we managed to develop solutions that allowed us to arrange natural fire in spaces you would not imagine, be it indoor or outdoor.

As the only company in the world we give you fully automatic fireplaces that guarantee convenience and safety. We carefully listen to our clients giving individually customized products. Our offer covers unique bioethanol and gas technologies that provide a lot of freedom in designing your perfect space with fire as the focal point.

The recognition says it all. Planika is global. With official subsidiaries in Europe, USA and Asia and an extensive distribution network we are present in over 100 countries around the world. But the success also lies in the concept of teal organization that Planika adopted. At the company there is no hierarchy and all the employees manage themselves to have freedom and a real influence on the products we create.

This made it possible to give you truly unique solutions in fire design.
This is the work of all of us.

- Planika

ETHANOL SOLUTIONS



MacPaw





Design by **Flou**



Design by **Vibieffe**



Design by **Elledue Arredamenti**



Design by Patrick Helou



Design by Vibiaffe



Van der Valk Hotel



FIRST OF ITS KIND FIREPLACE ON A YACHT



Design by **Mondomarine**
Serenity yacht




FIRE LINE AUTOMATIC 3

BEV Technology® (Burning Ethanol Vapours)

PROTECTIVE GLASS

CONTROL OPTIONS

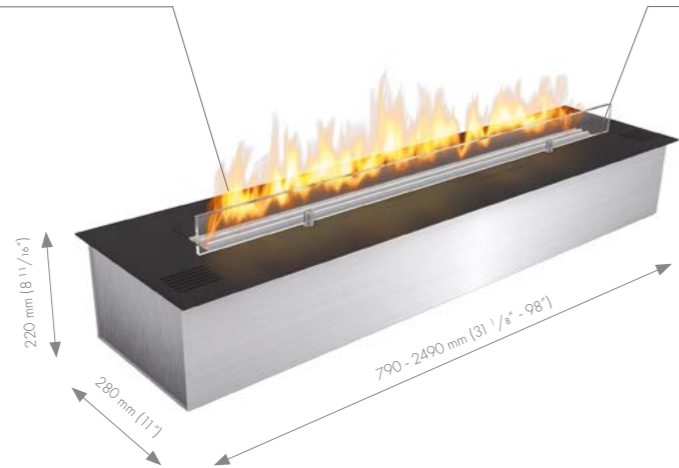

TOP FINISH

Black powder coating (standard)
Stainless steel (optional)
RAL color (optional)



Custom length



6 flame heights




No chimney




Automatic refueling

FIRE LINE AUTOMATIC 3


LENGTH	790 mm 31 1/8"	990 mm 39"	1190 mm 46 7/8"	1490 mm 58 11/16"	1990 mm 78 3/8"	2490 mm 98"
POWER	2.9 - 6.9 kW 10 009 - 23 426 BTU/h	3.7 - 8.1 kW 12 778 - 27 686 BTU/h	5.0 - 11.2 kW 17 037 - 38 334 BTU/h	6.2 - 15.0 kW 21 297 - 51 113 BTU/h	7.8 - 21.2 kW 26 621 - 72 410 BTU/h	9.4 - 27.5 kW 31 946 - 93 707 BTU/h
FUEL CAPACITY	4.5 L [US] 1.19 gal / [UK] 0.99 gal	5.5 L [US] 1.45 gal / [UK] 1.21 gal	8.3 L [US] 1.98 gal / [UK] 1.65 gal	10.0 L [US] 2.64 gal / [UK] 2.20 gal	12.5 L [US] 3.30 gal / [UK] 2.75 gal	15.0 L [US] 3.96 gal / [UK] 3.30 gal
BURNING TIME	4.0 - 10.0 h					
WEIGHT	25 kg / 55 lbs	29.5 kg / 65 lbs	33.5 kg / 74 lbs	40 kg / 88 lbs	51 kg / 112 lbs	61 kg / 134 lbs
HEATING VOLUME	min. 69 m³ / 2437 ft³	min. 81 m³ / 2966 ft³	min. 113 m³ / 3991 ft³	min. 150 m³ / 5297 ft³	min. 212 m³ / 7487 ft³	min. 275 m³ / 9712 ft³
VOLTAGE	230 V / [US] 115 V					




FRONT




LEFT FRONT / RIGHT FRONT




LEFT FRONT RIGHT



TUNNEL



ROOM DIVIDER



BY WALL



ISLAND



FLA 3 IN CASING A

BEV Technology® (Burning Ethanol Vapours)

PROTECTIVE GLASS

Optional mesh

CONTROL OPTIONS



TOP FINISH

Black powder coating (standard)
Stainless steel (optional)
RAL color (optional)



Custom length



6 flame heights



No chimney



Automatic refueling

FIRE LINE AUTOMATIC 3 IN CASING A

LENGTH	874 mm 34 7/16"	1074 mm 42 1/4"	1274 mm 50 3/16"	1574 mm 62"	2074 mm 81 5/8"	2574 mm 101 5/16"
POWER	2.9 - 6.9 kW 10 009 - 23 426 BTU/h	3.7 - 8.1 kW 12 778 - 27 686 BTU/h	5.0 - 11.2 kW 17 037 - 38 334 BTU/h	6.2 - 15.0 kW 21 297 - 51 113 BTU/h	7.8 - 21.2 kW 26 621 - 72 410 BTU/h	9.4 - 27.5 kW 31 946 - 93 707 BTU/h
FUEL CAPACITY	4.5 L [US] 1.19 gal / [UK] 0.99 gal	5.5 L [US] 1.45 gal / [UK] 1.21 gal	8.3 L [US] 1.98 gal / [UK] 1.65 gal	10.0 L [US] 2.64 gal / [UK] 2.20 gal	12.5 L [US] 3.30 gal / [UK] 2.75 gal	15.0 L [US] 3.96 gal / [UK] 3.30 gal
BURNING TIME	4.0 - 10.0 h					
WEIGHT	25 kg / 55 lbs	29.5 kg / 65 lbs	33.5 kg / 74 lbs	40 kg / 88 lbs	51 kg / 112 lbs	61 kg / 134 lbs
HEATING VOLUME	min. 69 m³ / 2437 ft³	min. 81 m³ / 2966 ft³	min. 113 m³ / 3991 ft³	min. 150 m³ / 5297 ft³	min. 212 m³ / 7487 ft³	min. 275 m³ / 9712 ft³
VOLTAGE	230 V / [US] 115 V					



FLA 3 IN CASING ONE

BEV Technology® (Burning Ethanol Vapours)



- Custom length
- 6 flame heights
- No chimney
- Automatic refueling


FIRE LINE AUTOMATIC 3 IN CASING ONE

	1080 mm 42 1/2"	1280 mm 50 3/8"	1480 mm 58 1/4"	1680 mm 66 1/8"	2280 mm 89 3/4"
Power	2.9 - 6.9 kW 10 009 - 23 426 BTU/h	3.7 - 8.1 kW 12 778 - 27 686 BTU/h	5.0 - 11.2 kW 17 037 - 38 334 BTU/h	6.2 - 15.0 kW 21 297 - 51 113 BTU/h	7.8 - 21.2 kW 26 621 - 72 410 BTU/h
Fuel Capacity	4.5 L [US] 1.19 gal / [UK] 0.99 gal	5.5 L [US] 1.45 gal / [UK] 1.21 gal	8.3 L [US] 1.98 gal / [UK] 1.65 gal	10.0 L [US] 2.64 gal / [UK] 2.20 gal	12.5 L [US] 3.30 gal / [UK] 2.75 gal
Runtime	4.0 - 10.0 h				
Volume	min. 69 m³ / 2437 ft³	min. 81 m³ / 2966 ft³	min. 113 m³ / 3991 ft³	min. 150 m³ / 5297 ft³	min. 212 m³ / 7487 ft³
Voltage	230 V / [US] 115 V				



FIRE LINE AUTOMATIC 3 XL


BEV Technology® (Burning Ethanol Vapours)

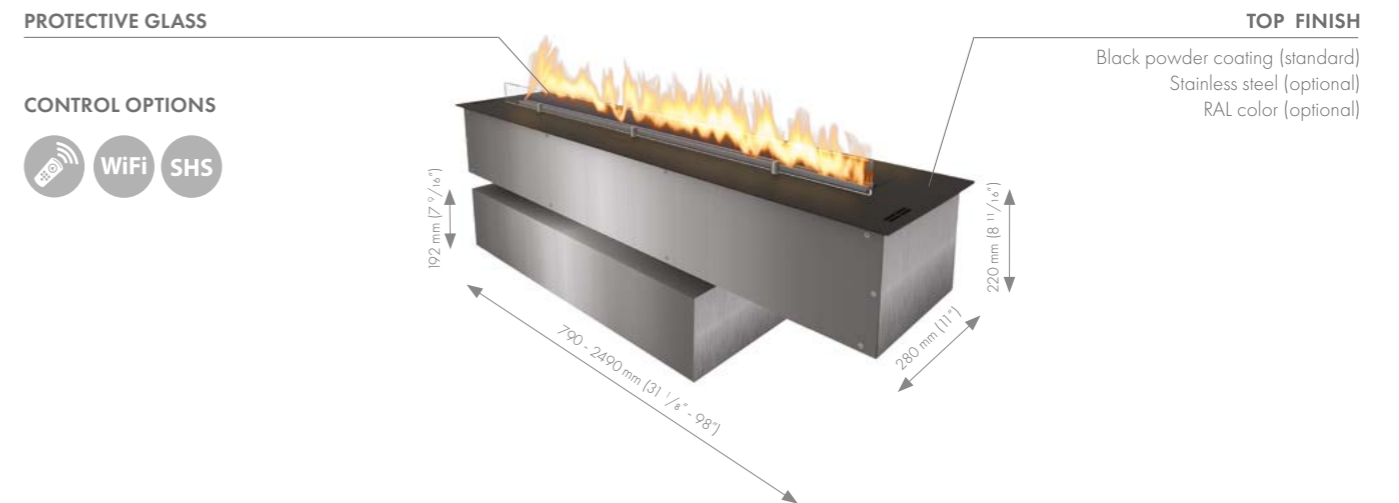

- Custom length
- 6 flame heights
- No chimney
- Automatic refueling

FIRE LINE AUTOMATIC 3 XL

	790 mm 31 1/8"	990 mm 39"	1190 mm 46 7/8"	1490 mm 58 11/16"	1990 mm 78 3/8"	2490 mm 98"
Power	2.9 - 6.9 kW 10 009 - 23 426 BTU/h	3.7 - 8.1 kW 12 778 - 27 686 BTU/h	5.0 - 11.2 kW 17 037 - 38 334 BTU/h	6.2 - 15.0 kW 21 297 - 51 113 BTU/h	7.8 - 21.2 kW 26 621 - 72 410 BTU/h	9.4 - 27.5 kW 31 946 - 93 707 BTU/h
Fuel Capacity	15.5 L [US] 4.09 gal / [UK] 3.41 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal
Runtime	14.0 - 33.0 h	18.5 - 40.0 h	13.0 - 30.0 h	10.0 - 24.0 h	7.0 - 19.0 h	5.5 - 16.0 h
Weight	32.1 kg / 70.8 lbs	35.1 kg / 77.4 lbs	38.1 kg / 84.0 lbs	42.6 kg / 94.0 lbs	50.3 kg / 110.9 lbs	57.8 kg / 127.4 lbs
Volume	min. 69 m³ / 2440 ft³	min. 81 m³ / 2860 ft³	min. 113 m³ / 3990 ft³	min. 150 m³ / 5300 ft³	min. 212 m³ / 7490 ft³	min. 275 m³ / 9710 ft³
Voltage	230 V / [US] 115 V					

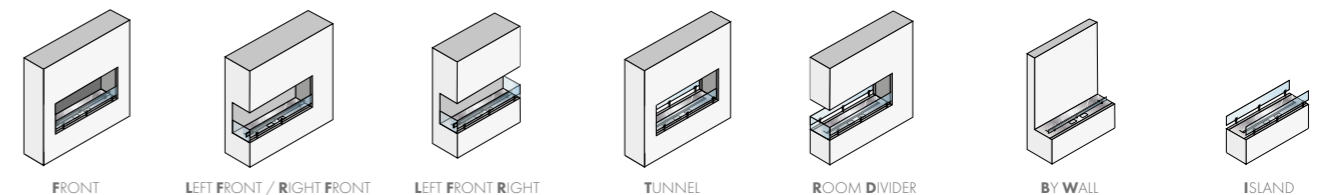



FLA 3 XL IN CASING A

BEV Technology® (Burning Ethanol Vapours)



PROTECTIVE GLASS

Optional mesh

CONTROL OPTIONS



TOP FINISH

Black powder coating (standard)
Stainless steel (optional)
RAL color (optional)



FIRE LINE AUTOMATIC 3 XL IN CASING A

	874 mm 31 1/8"	1074 mm 42 1/4"	1274 mm 50 1/8"	1574 mm 62"	2074 mm 81 5/8"	2574 mm 101 5/16"
	2.9 - 6.9 kW 10 009 - 23 426 BTU/h	3.7 - 8.1 kW 12 778 - 27 686 BTU/h	5.0 - 11.2 kW 17 037 - 38 334 BTU/h	6.2 - 15.0 kW 21 297 - 51 113 BTU/h	7.8 - 21.2 kW 26 621 - 72 410 BTU/h	9.4 - 27.5 kW 31 946 - 93 707 BTU/h
	4.5 L [US] 1.19 gal / [UK] 0.99 gal	5.5 L [US] 1.45 gal / [UK] 1.21 gal	8.3 L [US] 1.98 gal / [UK] 1.65 gal	10.0 L [US] 2.64 gal / [UK] 2.20 gal	12.5 L [US] 3.30 gal / [UK] 2.75 gal	15.0 L [US] 3.96 gal / [UK] 3.30 gal
	14.0 - 33.0 h	18.5 - 40.0 h	13.0 - 30.0 h	10.0 - 24.0 h	7.0 - 19.0 h	5.5 - 16.0 h
	min. 69 m³ / 2440 ft³	min. 81 m³ / 2860 ft³	min. 113 m³ / 3990 ft³	min. 150 m³ / 5300 ft³	min. 212 m³ / 7490 ft³	min. 275 m³ / 9710 ft³
	230 V / [US] 115 V					



FLA 3 XL IN CASING ONE

BEV Technology® (Burning Ethanol Vapours)




PROTECTIVE GLASS

CONTROL OPTIONS



TOP FINISH

Black powder coating (standard)
Stainless steel (optional)
RAL color (optional)



FIRE LINE AUTOMATIC 3 XL IN CASING ONE

	1080 mm 42 1/2"	1280 mm 50 3/8"	1480 mm 58 1/4"	1680 mm 66 1/8"	2280 mm 89 3/4"
	2.9 - 6.9 kW 10 009 - 23 426 BTU/h	3.7 - 8.1 kW 12 778 - 27 686 BTU/h	5.0 - 11.2 kW 17 037 - 38 334 BTU/h	6.2 - 15.0 kW 21 297 - 51 113 BTU/h	7.8 - 21.2 kW 26 621 - 72 410 BTU/h
	15.5 L [US] 4.0 gal / [UK] 3.3 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal	24.0 L [US] 6.34 gal / [UK] 5.28 gal
	14.0 - 33.0 h	18.5 - 40.0 h	13.0 - 30.0 h	10.0 - 24.0 h	7.0 - 19.0 h
	min. 69 m³ / 2440 ft³	min. 81 m³ / 2860 ft³	min. 113 m³ / 3990 ft³	min. 150 m³ / 5300 ft³	min. 212 m³ / 7490 ft³
	230 V / [US] 115 V				





FLA 3 XL SUITE LOGS

BEV Technology® (Burning Ethanol Vapours)



PROTECTIVE GLASS

CONTROL OPTIONS



Custom length



6 flame heights



No chimney



Automatic refueling

FIRE LINE AUTOMATIC 3 SUITE LOGS

	5.0 - 9.4 kW / 17 038 - 31 946 BTU/h
	24.0 L / [US] 6.34 gal / [UK] 5.28 gal
	16 - 30 h
	89.0 kg / 196.2 lbs
	min. 94 m³ / 3320 ft³
	230 V / [US] 115 V



FRONT



LEFT FRONT / RIGHT FRONT



LEFT FRONT RIGHT



Design by Design Avenue



Design by Design Pahomova and Azovskiy



PRIME FIRE

BEV Technology® (Burning Ethanol Vapours)

PRIME FIRE IN CASING

BEV Technology® (Burning Ethanol Vapours)

OPTIONAL PROTECTIVE GLASS

OPTIONAL CONTROL



2 flame heights




No chimney



Automatic refueling

PRIME FIRE	
	700 mm 27 1/8" 1000 mm 39 3/8"
	1.9 - 3.1 kW / 6839 - 10648 BTU/h 3.7 - 5.6 kW / 12778 - 19167 BTU/h
	2.0 L / [US] 0.5 gal / [UK] 0.4 gal 3.5 L / [US] 0.9 gal / [UK] 0.8 gal
	4.0 - 6.5 h 4.0 - 6.0 h
	min. 31 m³ / 1095 ft³ min. 56 m³ / 1978 ft³
	12.0 kg / 26.5 lbs approx. 18.2 kg / 40.1 lbs
	230 V / [US] 115 V

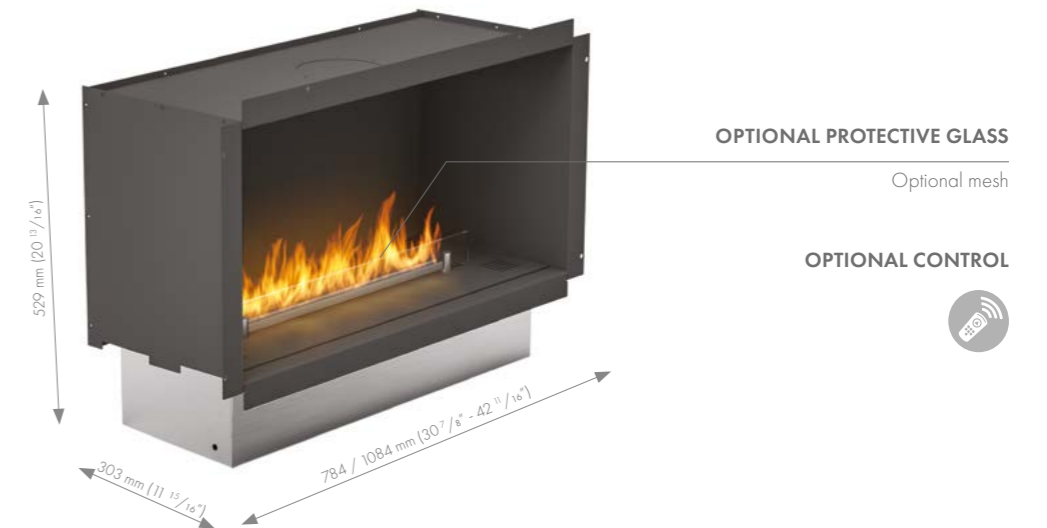

2 flame heights




No chimney




Automatic refueling


PRIME FIRE IN CASING	
	784 mm 30 7/8" 1084 mm 42 1/8"
	1.9 - 3.1 kW / 6839 - 10648 BTU/h 3.7 - 5.6 kW / 12778 - 19167 BTU/h
	2.0 L / [US] 0.5 gal / [UK] 0.4 gal 3.5 L / [US] 0.9 gal / [UK] 0.8 gal
	4.0 - 6.5 h 4.0 - 6.0 h
	min. 31 m³ / 1090 ft³ min. 56 m³ / 1978 ft³
	18.0 kg / 40.0 lbs not verified yet
	230 V / [US] 115 V




FRONT




LEFT FRONT / RIGHT FRONT




LEFT FRONT RIGHT



TUNNEL



ROOM DIVIDER



BY WALL



ISLAND





BASKET FIRE LOGS


BEV Technology® (Burning Ethanol Vapours)

PROTECTIVE GLASS

CONTROL OPTIONS



OPTIONAL

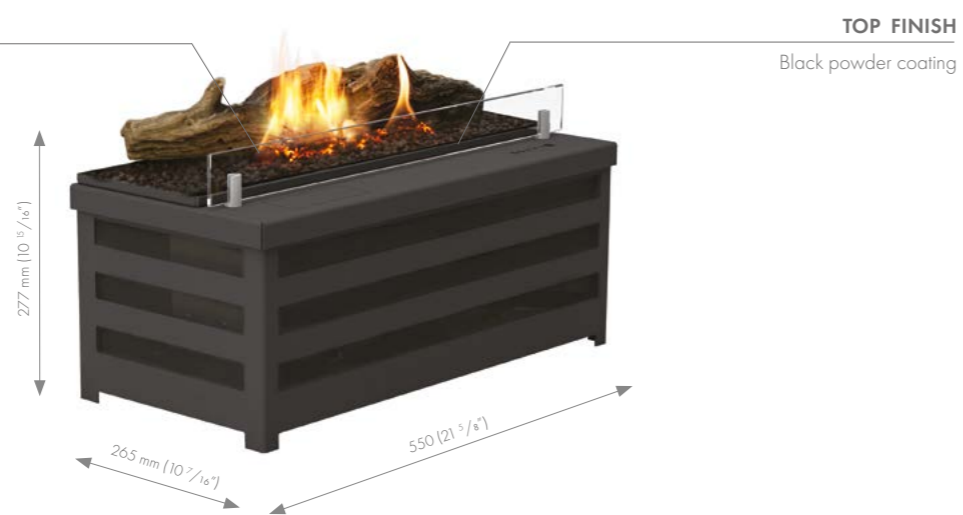

TOP FINISH

Black powder coating



Freestanding



2 flame heights



No chimney



Automatic refueling

BASKET FIRE LOGS

550 mm | 21 5/8"

2.5 kW
8520 BTU/h

1.8 L
[US] 0.48 gal / [UK] 0.4 gal

max. 4.5 h

14.8 kg / 32.6 lbs

min. 25 m³ / 880 ft³

230 V / [US] 115 V



L-FIRE


BEV Technology® (Burning Ethanol Vapours)

OPTIONAL CONTROL



TOP FINISH

Black powder coating

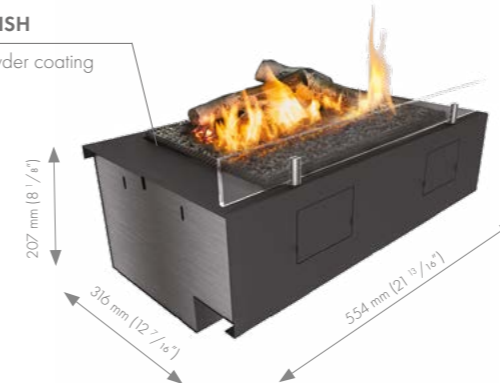

PROTECTIVE GLASS

Optional mesh



2 flame heights



No chimney



Automatic refueling

L-FIRE

L-FIRE IN CASING



2.5 - 4.4 kW / 8515 - 14908 BTU/h



6.0 L / [US] 1.58 gal / [UK] 1.32 gal



8.5 - 15 h



min. 44 m³ / 1554 ft³



16.5 kg / 36.4 lbs

27.0 kg / 59.5 lbs



230 V / [US] 115 V



LINCOLN

BEV Technology® (Burning Ethanol Vapours)

PROTECTIVE GLASS

Optional mesh

CONTROL OPTIONS



FINISH

White MDF

TOP FINISH

Black powder coating



Freestanding



2 flame heights



No chimney



Easy refueling system

LINCOLN

	2.5 - 4.4 kW 8515 - 14908 BTU/h
	6.0 L [US] 1.58 gal / [UK] 1.32 gal
	8.5 - 15 h
	57.0 kg / 126.0 lbs
	min. 44 m³ / 1550 ft³
	230 V / [US] 115 V



PURE FLAME TV BOX

BEV Technology® (Burning Ethanol Vapours)

PROTECTIVE GLASS

Optional mesh

CONTROL OPTIONS



OPTIONAL

TOP FINISH

White MDF
Natural oak veneer



Freestanding



2 flame heights



No chimney



Easy refueling system

PURE FLAME TV BOX

	1860 mm 73 1/8"
	5 kW 17038 BTU/h
	5.0 L [US] 1.32 gal / [UK] 1.01 gal
	6.25 - 12.5 h
	76.0 kg / 168.0 lbs
	min. 50 m³ / 1770 ft³
	230 V / [US] 115 V



PURE FLAME

BEV Technology® (Burning Ethanol Vapours)

PROTECTIVE GLASS

Optional mesh

CONTROL OPTIONS



OPTIONAL

TOP FINISH

Black powder coating



Insert for installation in furniture



2 flame heights



No chimney



Easy refueling system

PURE FLAME

	5 kW 17 038 BTU/h
	5.0 L [US] 1.32 gal / [UK] 1.01 gal
	6.25 - 12.5 h
	22.5 kg / 49.6 lbs
	min. 50 m³ / 1770 ft³
	230 V / [US] 115 V



GAS SOLUTIONS











VALENTINO

Linear burner (balanced flue system)



BACK WALL FINISH

Black matte steel (standard)
Black ceramic glass (optional)

DECORATION

Logs, granules & chips
Black diamond stones
Pebbles & gold vermiculite

CONTROL OPTIONS



MONROE

Campfire burner (balanced flue system)



BACK WALL FINISH

Black matte steel (standard)
Black ceramic glass (optional)
Brick panel (optional)

CONTROL OPTIONS



- Thermostat
- Modular burner
- Gas and CO detectors
- Antireflective glass

VALENTINO	
MAX WIDTH	1000 mm 39 3/8"
FLAME	(NG) max. 6.4 kW 21 837 BTU/h (LPG) max. 6.7 kW 22 861 BTU/h
GAS	(NG) max. 0.9 m³/h 31.8 ft³/h (LPG) max. 0.7 kg/h 1.54 lbs/h
FLUE	Concentric flue 200/130
VOLTAGE	230 V / [US] 115 V



- Thermostat
- Modular burner
- Gas and CO detectors
- Antireflective glass

MONROE	
MAX WIDTH	900 mm 35 7/16"
FLAME	(NG) max. 8.3 kW 28 320 BTU/h (LPG) max. 9.2 kW 31 392 BTU/h
GAS	(NG) max. 1.2 m³/h 42.4 ft³/h (LPG) max. 0.96 kg/h 2.12 lbs/h
FLUE	Concentric flue
VOLTAGE	230 V / [US] 115 V





SINATRA

Linear burner (conventional flue system)



BACK WALL FINISH

- Black matte steel
- Black ceramic glass
- Brick panel

DECORATION

- Logs, granules & chips
- Black diamond stones
- Pebbles & gold vermiculite
- Glass embers
- LED + Crystal diamond embers

CONTROL OPTIONS

- STANDARD (Radio icon)
- OPTIONAL (WiFi icon)
- COMPATIBLE (SHS icon)



Custom length



Gas and CO detectors



Ceramic or antireflective glass (or no glass)

SINATRA

	1200 mm 47 1/4"	1600 mm 63"	2000 mm 78 3/4"	2400 mm 94 1/2"
	(NG) max. 10.3 kW 35 145 BTU/h (LPG) max. 9.5 kW 32 415 BTU/h	(NG) max. 15.0 kW 51 185 BTU/h (LPG) max. 14.3 kW 48 794 BTU/h	(NG) max. 19.7 kW 67 219 BTU/h (LPG) max. 19.0 kW 64 831 BTU/h	(NG) max. 19.8 kW 67 560 BTU/h (LPG) max. 20.0 kW 68 243 BTU/h
	(NG) max. 1.09 m³/h 38.5 ft³/h (LPG) max. 0.75 kg/h 1.65 lbs/h	(NG) max. 1.58 m³/h 55.8 ft³/h (LPG) max. 1.12 kg/h 2.47 lbs/h	(NG) max. 2.09 m³/h 73.8 ft³/h (LPG) max. 1.50 kg/h 3.31 lbs/h	(NG) max. 2.09 m³/h 73.8 ft³/h (LPG) max. 1.57 kg/h 3.46 lbs/h
	Conventional			
	230 V / [US] 115 V			



FRONT LEFT FRONT RIGHT FRONT LEFT FRONT RIGHT TUNNEL ROOM DIVIDER ISLAND



VERSAL INSERT

Linear Fire (conventional flue system)



DECORATION

Logs & chips

CONTROL OPTIONS

- STANDARD (Radio icon)
- OPTIONAL (WiFi icon)
- COMPATIBLE (SHS icon)



Easy to install



Ambient LED illumination

VERSAL INSERT

	350 mm 13 3/4"	550 mm 21 5/8"	700 mm 27 1/8"	850 mm 33 1/8"
	(NG) max. 3.0 kW 10 236 BTU/h (LPG) max. 3.8 kW 12 966 BTU/h	(NG) max. 4.5 kW 15 355 BTU/h (LPG) max. 4.9 kW 16 719 BTU/h	(NG) max. 5.2 kW 17 743 BTU/h (LPG) max. 5.9 kW 20 132 BTU/h	(NG) max. 7.4 kW 25 250 BTU/h (LPG) max. 7.6 kW 25 932 BTU/h
	(NG) max. 0.32 m³/h 11.3 ft³/h (LPG) max. 0.30 kg/h 0.66 lbs/h	(NG) max. 0.48 m³/h 17.0 ft³/h (LPG) max. 0.39 kg/h 0.86 lbs/h	(NG) max. 0.55 m³/h 19.4 ft³/h (LPG) max. 0.47 kg/h 1.03 lbs/h	(NG) max. 0.79 m³/h 27.9 ft³/h (LPG) max. 0.60 kg/h 1.32 lbs/h
	Conventional			
	230 V / [US] 115 V			



VERSAL INSERT (350mm) VERSAL INSERT (550mm) VERSAL INSERT (700mm) VERSAL INSERT (850mm)



VERSAL CASSETTE

Linear Fire (conventional flue system)



DECORATION

Logs & chips

BACK WALL FINISH

Black matte steel (standard)
Black ceramic glass (optional)
Brick panel (optional)

OPTIONAL DECORATIVE FRAME

CONTROL OPTIONS



Easy to install



Ambient LED illumination

VERSAL CASSETTE

	400 mm 15 3/4"	600 mm 23 3/8"	750 mm 29 1/2"	900 mm 35 7/16"
	(NG) max. 3.0 kW 10 236 BTU/h (LPG) max. 3.8 kW 12 966 BTU/h	(NG) max. 4.6 kW 15 696 BTU/h (LPG) max. 4.9 kW 16 719 BTU/h	(NG) max. 5.3 kW 18 084 BTU/h (LPG) max. 6.0 kW 20 473 BTU/h	(NG) max. 7.5 kW 25 591 BTU/h (LPG) max. 7.6 kW 25 932 BTU/h
	(NG) max. 0.32 m ³ /h 11.3 ft ³ /h (LPG) max. 0.30 kg/h 0.66 lbs/h	(NG) max. 0.49 m ³ /h 17.3 ft ³ /h (LPG) max. 0.39 kg/h 0.86 lbs/h	(NG) max. 0.56 m ³ /h 19.8 ft ³ /h (LPG) max. 0.47 kg/h 1.03 lbs/h	(NG) max. 0.79 m ³ /h 27.9 ft ³ /h (LPG) max. 0.60 kg/h 1.32 lbs/h
	Conventional			
	230 V / [US] 115 V			



VERSAL CASSETTE (400mm)



VERSAL CASSETTE (600mm)



VERSAL CASSETTE (750mm)



VERSAL CASSETTE (900mm)



VERSAL FREESTANDING

Linear Fire (conventional flue system)



DECORATION

Logs & chips

BACK WALL FINISH

Black matte steel (standard)
Black ceramic glass (optional)
Brick panel (optional)

CONTROL OPTIONS



GASBOX

WOODBOX



Freestanding



Ambient LED illumination

VERSAL FREESTANDING

	400 mm 15 3/4"	600 mm 23 3/8"	750 mm 29 1/2"	900 mm 35 7/16"
	+ GASBOX 398 x 1213 x 320 mm 15 11/16" x 47 3/4" x 12 5/8" + WOODBOX 398 x 1013 x 320 mm 15 11/16" x 39 7/8" x 12 5/8"	+ GASBOX 598 x 1213 x 320 mm 23 3/8" x 47 3/4" x 12 5/8" + WOODBOX 598 x 1013 x 320 mm 23 3/8" x 39 7/8" x 12 5/8"	+ GASBOX 748 x 1213 x 320 mm 29 1/2" x 47 3/4" x 12 5/8" + WOODBOX 748 x 1013 x 320 mm 29 1/2" x 39 7/8" x 12 5/8"	+ GASBOX 898 x 1213 x 320 mm 35 7/16" x 47 3/4" x 12 5/8" + WOODBOX 898 x 1013 x 320 mm 35 7/16" x 39 7/8" x 12 5/8"
	(NG) max. 3.0 kW 10 236 BTU/h (LPG) max. 3.8 kW 12 966 BTU/h	(NG) max. 4.6 kW 15 696 BTU/h (LPG) max. 4.9 kW 16 719 BTU/h	(NG) max. 5.3 kW 18 084 BTU/h (LPG) max. 6.0 kW 20 473 BTU/h	(NG) max. 7.5 kW 25 591 BTU/h (LPG) max. 7.6 kW 25 932 BTU/h
	(NG) max. 0.32 m ³ /h 11.3 ft ³ /h (LPG) max. 0.30 kg/h 0.66 lbs/h	(NG) max. 0.49 m ³ /h 17.3 ft ³ /h (LPG) max. 0.39 kg/h 0.86 lbs/h	(NG) max. 0.56 m ³ /h 19.8 ft ³ /h (LPG) max. 0.47 kg/h 1.03 lbs/h	(NG) max. 0.79 m ³ /h 27.9 ft ³ /h (LPG) max. 0.60 kg/h 1.32 lbs/h
	Conventional			
	230 V / [US] 115 V			



VERSAL FREESTANDING (400MM)



VERSAL FREESTANDING (600mm)



VERSAL FREESTANDING (750mm)



VERSAL FREESTANDING (900mm)

FIRE TABLES COLLECTION





FIRE TABLES

Commerce Technology™ (Absorbent Ceramic Fibers)



FIRE COFFEE TABLE



FIRE TABLE MINI

FIRE TABLE ROUND



No smoke or ash



No electricity required



Safe burning technology



Easy refueling system

	FIRE COFFEE TABLE	FIRE TABLE MINI	FIRE TABLE ROUND
	[LxHxD] 1180 x 700 x 420 mm [LxHxD] 46 7/16" x 27 9/16" x 16 9/16"	[LxHxD] 900 x 600 x 420 mm [LxHxD] 35 7/16" x 23 5/8" x 16 9/16"	[ØxH] 615 x 400 mm [ØxH] 24 3/16" x 15 3/4"
	36.0 kg / 79.4 lbs	15.8 kg / 34.8 lbs	7.0 kg / 15.4 lbs
	Varnished natural OSB / Black varnished OSB White MDF / Black MDF	Varnished natural OSB / White MDF	Varnished natural OSB / Black varnished OSB
	2.5 kW / 8 519 BTU/h		
	1.5 L / [US] 0.4 gal / [UK] 0.33 gal		
	3.5 h		
	min. 25 m³ / 880 ft³		

FIRE TABLES

Commerce Technology™ (Absorbent Ceramic Fibers)



CARO TABLE



TONDO TABLE



JAR TABLE



No smoke or ash



No electricity required



Safe burning technology



Easy refueling system

	CARO TABLE	TONDO TABLE	JAR TABLE
	[ØxH] 680 x 1189 mm [ØxH] 26 3/4" x 46 13/16"	[ØxH] 800 x 683 mm [ØxH] 31 1/2" x 26 7/8"	[ØxH] 680 x 772 mm [ØxH] 26 3/4" x 30 3/8"
	10.3 kg / 22.7 lbs	24.1 kg / 53.1 lbs	49.0 kg / 108.0 lbs
	2.5 kW / 8 519 BTU/h		
	3.0 L / [US] 0.78 gal / [UK] 0.66 gal		
	6.5 h		
	min. 25 m³ / 880 ft³		

OUTDOOR COLLECTION







ETHANOL FIREPLACES

Commerce Technology™ (Absorbent Ceramic Fibers)



- No smoke or ash
- No electricity required
- Safe burning technology
- Easy refueling system

	CARO	TOTEM	GUSTAV	JAR	TONDO
	[ØxH] 383 x 1189 mm [ØxH] 15 1/16" x 46 13/16"	[ØxH] 395 x 1070 mm [ØxH] 15 1/2" x 42 1/4"	[ØxH] 444 x 962 mm [ØxH] 17 1/2" x 37 7/8"	[ØxH] 410 x 795 mm [ØxH] 16 1/8" x 31 5/16"	[ØxH] 700 x 423 mm [ØxH] 27 9/16" x 16 5/8"
	10.3 kg / 22.7 lbs	24.5 kg / 54.0 lbs	16.3 kg / 35.8 lbs	41.5 kg / 91.5 lbs	14.0 kg / 30.9 lbs
	2.5 kW / 8 547 BTU/h				
	3.0 L / [US] 0.78 gal / [UK] 0.66 gal				
	6.5 h				
	min. 25 m³ / 882 ft³				

ETHANOL TABLETOP FIRES

Commerce Technology™ (Absorbent Ceramic Fibers)



- No smoke or ash
- No electricity required
- Safe burning technology
- Easy refueling system

	SIMPLE	RONDO	DANCING FLAME
	[ØxH] 308 x 418 mm [ØxH] 12 1/8" x 16 7/16"	[ØxH] 412 x 412 mm [ØxH] 16 1/4" x 16 1/4"	[ØxH] 444 x 962 mm [ØxH] 17 1/2" x 37 7/8"
	6.5 kg / 14.3 lbs	7.0 kg / 15.4 lbs	2.0 kg / 4.4 lbs
	3.0 L / [US] 0.8 gal / [UK] 0.66 gal		1.5 L / [US] 0.4 gal / [UK] 0.33 gal
	6.5 h		3.5 h
	2.5 kW / 8 519 BTU/h		
	min. 25 m³ / 880 ft³		



GALIO CORTEN

Gas Technology



GALIO INSERT


Gas Technology

PROTECTIVE GLASS

CONTROL OPTIONS




CONTROL OPTIONS



DECORATION

Black diamond stones

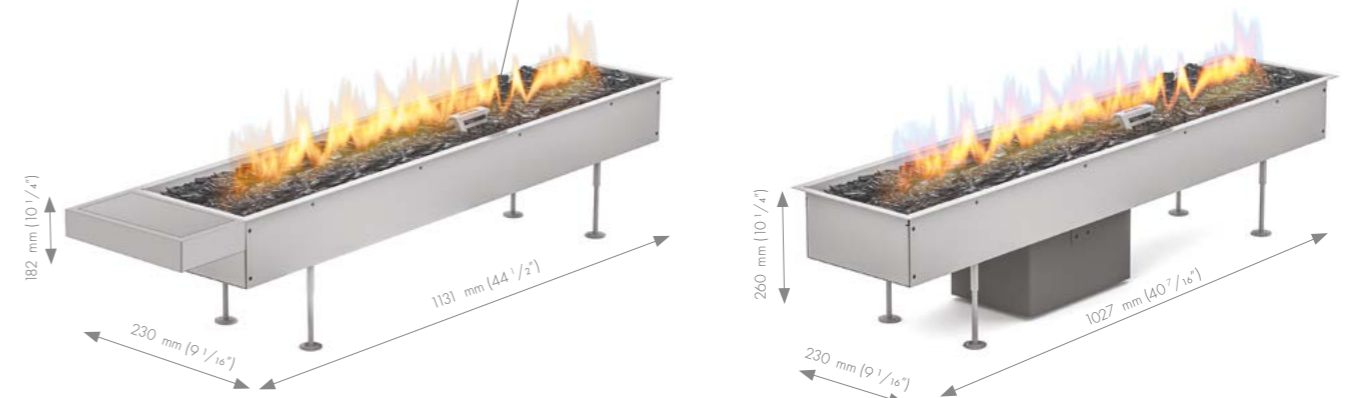

Custom shape



Smooth flame height regulation



Thermocouple



Custom shape



Smooth flame height regulation



Thermocouple



Easy to install

	GALIO CORTEN MANUAL (LPG)	GALIO CORTEN AUTOMATIC (NATURAL GAS/LPG)
	(LPG) max. 12.0 kW 40 946 BTU/h	(NG) max. 9.4 kW 32 074 BTU/h (LPG) max. 11.8 kW 40 263 BTU/h
	(LPG) max. 1.06 kg/h 2.33 lbs/h	(NG) max. 1.0 m ³ /h 35.3 ft ³ /h (LPG) max. 0.93 kg/h 2.05 lbs/h
	(LPG) 37 mbar 11"wc	(NG) 20 mbar 7"wc (LPG) 37 mbar 11"wc
	31.0 kg / 68.3 lbs	31.0 kg / 68.3 lbs

	GALIO INSERT MANUAL (LPG)	GALIO INSERT AUTOMATIC (NATURAL GAS/LPG)
	(LPG) max. 12.0 kW 40 946 BTU/h	(NG) max. 9.4 kW 32 074 BTU/h (LPG) max. 11.8 kW 40 263 BTU/h
	(LPG) max. 1.06 kg/h 2.33 lbs/h	(NG) max. 1.0 m ³ /h 35.3 ft ³ /h (LPG) max. 0.93 kg/h 2.05 lbs/h
	(LPG) 37 mbar 11"wc	(NG) 20 mbar 7"wc (LPG) 37 mbar 11"wc
	13.0 kg / 28.7 lbs	21.0 kg / 46.3 lbs



GALIO FIRE PIT

Gas Technology



GUSTAV GAS

Gas Technology

CONTROL OPTIONS



DECORATION

Black diamond stones

CORTEN STEEL



DECORATION

Black diamond stones

CORTEN STEEL



Custom shape



Smooth flame height regulation



Thermocouple



Easy to install



Thermocouple



Anti-tilt shutoff valve



Freestanding

	GALIO FIRE PIT INSERT	GALIO FIRE PIT CORTEN
		[NG] max. 4.7 kW 16 037 BTU/h [LPG] max. 5.1 kW 13 990 BTU/h
		[NG] max. 0.5 m³/h 17.7 ft³/h [LPG] max. 0.98 kg/h 2.16 lbs/h
		[NG] 20 mbar 7"wc [LPG] 37 mbar 11"wc
	15.0 kg / 33.0 lbs	65.0 kg / 143.3 lbs

	GUSTAV GAS
	[LPG] max. 4.0 kW max. 13650 BTU/h
	[LPG] max. 0.32 kg/h max. 0.7 lbs/h
	[LPG] 37 mbar 7"wc
	32.0 kg / 70.5 lbs



LIGHTHOUSE

Gas Technology

TEMPERED GLASS



Tempered glass



Thermocouple



Anti-tilt shutoff valve



Freestanding

LIGHTHOUSE

(LPG) max. 4.0 kW | max. 13650 BTU/h

(LPG) max. 0.32 kg/h | max. 0.7 lbs/h

(LPG) 37 mbar | 7"wc

42.0 kg / 92.6 lbs